



CRY3202-S02

1/2" Pressure-field, Prepolarized, Wide-Frequency Microphone Set

Features

- **Key Specifications**

Sensitivity	12.5 mV/Pa
Dynamic Range	23 dB to 150 dB
Frequency Range	3.15 Hz to 20 kHz ± 2 dB

- **Applications**

In-ear monitor measurements - used in conjunction with a coupler
Wideband earbud measurements - used in conjunction with a coupler

- **Standards**

IEC 61094 4:1995 Measurement microphones - Part 4

- **Components**

CRY3202 1/2" Pressure-field Prepolarized Microphone
CRY3503 1/2" IEPE Preamplifier

Introduction

CRY3202-S02 is a pressure-field prepolarized microphone and preamplifier set widely used in acoustic testing environments, such as anechoic chambers and quiet rooms. Its frequency response range matches the auditory frequency range of the human ear, making it highly suitable for noise detection. Additionally, it is also widely applicable in various fields including electroacoustic measurements, audio measurements, and acoustical research.

Highlights

- **Use of Wide-frequency Pressure-field Microphones**

Wide-frequency microphones can cover a wide frequency range from very low frequencies to high frequencies, making them highly suitable for testing and measuring various acoustic environments and sound sources. Pressure-field microphone sets are specifically designed for measurements in small enclosed cavities or near the sound source ports, and are widely used in fields such as acoustic research and electroacoustic testing.

- **Compatibility**

The CRY SOUND pre-polarized microphone kit requires a constant current source power module (IEPE power supply), also known as ICP, CCP, etc., capable of supplying a current ranging from 2mA to 20mA.

- **TEDS Microphone Set**

Supports TEDS, and TEDS programmed to the IEEE 1451.4 standard for SMART transducers, V 1.0 format.

- **Calibration**

Each CRY SOUND microphone set is calibrated at the factory using traceable calibration equipment. Calibration certificates are provided with each unit. CRY SOUND recommends recalibration at least once a year.

- **Quality & Warranty**

All CRY SOUND microphone capsules use 3rd generation titanium diaphragms and protection grids and synthetic sapphire insulators - resulting in the most rugged and reliable measurement microphones on the market. Titanium provides superior corrosion resistance, high temperature stability, impact resistance and strength-to-mass than traditional nickel and stainless steel. All capsules are assembled in strict clean-room environments for maximum quality.

CRY SOUND microphones and preamplifiers are supported by a 10-year warranty—offering one of the best service guarantees in the world.

Technical Specifications

Specifications

Field Type	Pressure-field
Sensitivity(± 1.5 dB)	12.5 mV/Pa, -38 dB re 1V/Pa
Frequency Response	3.15 Hz to 20 kHz ± 2 dB
Polarization Voltage	0 V
Dynamic Range(re.20uPa)	23 dB to 150 dB
Inherent noise	23 dBA
Operating Temperature	-30°C to +70°C (-22°F to +158°F)
Temperature Stability	0.005dB/°C (-10 to +50°C) 0.003dB/°F (+14 to +122°F)
Static Pressure Stability	-0.01 dB/kPa
Operating Humidity Range	0 to 90%RH no condensation
Humidity Stability	< 0.1 dB (0 to 90%RH no condensation)
Pressure Equalization Vent	Rear vented
IEC 61094-4 Type	WS2P
Output Impedance	< 50 Ω
Maximum Output Voltage	> 10.0 Vp
DC Bias Voltage	12V \pm 2 V
Power Supply	IEPE (2 mA to 20 mA)
Typical Operating Current	4 mA
Interface Type	10-32UNF(Microdot)

Frequency Response

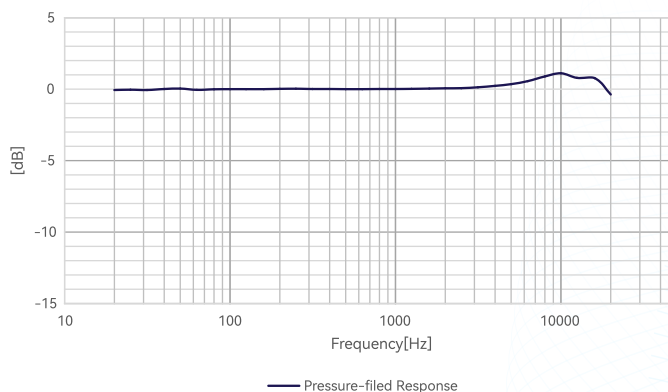


Fig.1 CRY3202-S02 Microphone Set Typical Frequency Response

Dimensions

Height with Grid	36.7 mm (1.44")
Diameter with Grid	13.2 mm (0.52")

Drawings(mm)[inch]

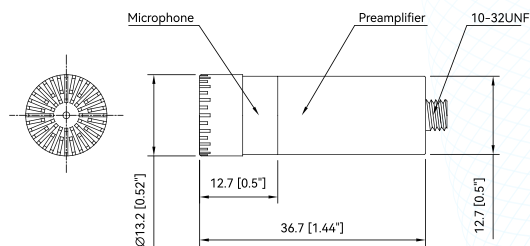


Fig.2 CRY3202-S02 Microphone Set Drawings

Ordering Information

Consisting of

Measurement Microphone	CRY3202 1/2" Pressure-field Prepolarized Microphone
Preamplifier	CRY3503 1/2" IEPE Preamplifier
Cable	10-32UNF/M5 to BNC Cable /1.5m

Optional Accessories

Microphone Holder	1/2" Microphone Holder
Power Supply	CRY575 Three-channel Microphone Power Supply

Related Products

CRY3102-S01	1" pressure-field prepolarized low-noise microphone set, 50 mV/Pa, 4 Hz-8 kHz, 12 dB-138dB
CRY3202-S01	1/2" pressure-field prepolarized wide-frequency microphone set, 12.5 mV/Pa, 3.15 Hz-20kHz, 23 dB-150dB
CRY3204-S01	1/2" pressure-field prepolarized high-sensitivity microphone set, 50 mV/Pa, 3.15 Hz-10 kHz, 15 dB-138dB