



CRY3201-S01

1/2" Free-field, Prepolarized, High- frequency Microphone Set

Features

- **Key Specifications**

Sensitivity	12.5 mV/Pa
Dynamic Range	23 dB to 150 dB
Frequency Range	3.15 Hz to 40 kHz

- **Applications**

High-frequency (ultrasonic) measurements
High-definition speakers and NVH measurements
High sound pressure level (SPL) measurements

- **Standards**

IEC 61094 4:1995 Measurement microphones - Part 4

- **Components**

CRY3201 1/2" Free-field Prepolarized Microphone
CRY3501 1/2" IEPE Preamplifier

Introduction

CRY3201-S01 is a 1/2" free-field, prepolarized microphone and preamplifier set designed for high frequency and high dynamic range acoustic measurements. With a flat frequency response to 40k Hz and sound pressure levels up to 150 dB, it is an excellent general purpose measurement microphone for High-Definition Audio measurements and other ultrasonic acoustic applications.

Highlights

- **Use of High-frequency Free-field Microphones**

High-frequency microphones can accurately capture high frequency sounds and are highly suitable for ultrasonic detection, high-frequency acoustic research, and other similar applications.

Free-field microphone sets are specifically designed for measurements in environments that are free from reflections or echoes and are widely used in fields such as acoustic research, noise monitoring, and sound system testing.

- **Compatibility**

The CRY SOUND pre-polarized microphone kit requires a constant current source power module (IEPE power supply), also known as ICP, CCP, etc., capable of supplying a current ranging from 2mA to 20mA.

- **TEDS Microphone Set**

Supports TEDS, and TEDS programmed to the IEEE 1451.4 standard for SMART transducers, V 1.0 format.

- **Calibration**

Each CRY SOUND microphone set is calibrated at the factory using traceable calibration equipment. Calibration certificates are provided with each unit. CRY SOUND recommends recalibration at least once a year.

- **Quality & Warranty**

All CRY SOUND microphone capsules use 3rd generation titanium diaphragms and protection grids and synthetic sapphire insulators - resulting in the most rugged and reliable measurement microphones on the market. Titanium provides superior corrosion resistance, high temperature stability, impact resistance and strength-to-mass than traditional nickel and stainless steel. All capsules are assembled in strict clean-room environments for maximum quality.

CRY SOUND microphones and preamplifiers are supported by a 10-year warranty—offering one of the best service guarantee in the world.

Technical Specifications

Specifications

Field Type	Free-field
Sensitivity(± 1.5 dB)	12.5 mV/Pa, -38 dB re 1 V/Pa
Frequency Response	3.15 Hz to 40 kHz ± 2 dB
Polarization Voltage	0 V
Dynamic Range(re.20uPa)	23 dB to 150 dB
Inherent noise	23 dBA
Operating Temperature	-30°C to +70°C (-22°F to +158°F)
Temperature Stability	0.005 dB/°C (-10°C to +50°C) 0.003 dB/°F (+14°F to +122°F)
Static Pressure Stability	-0.01 dB/kPa
Humidity Range	0 to 90%RH no condensation
Humidity Stability	< 0.1 dB (0 to 90%RH no condensation)
Pressure Equalization Vent	Rear vented
IEC 61094-4 Type	WS2F
Output Impedance	< 50 Ω
Maximum Output Voltage	> 10.0 Vp
Power Supply	IEPE (2 mA to 20 mA)
DC Bias Voltage	12V \pm 2 V
Typical Operating Current	4 mA
Interface Type	BNC

Frequency Response

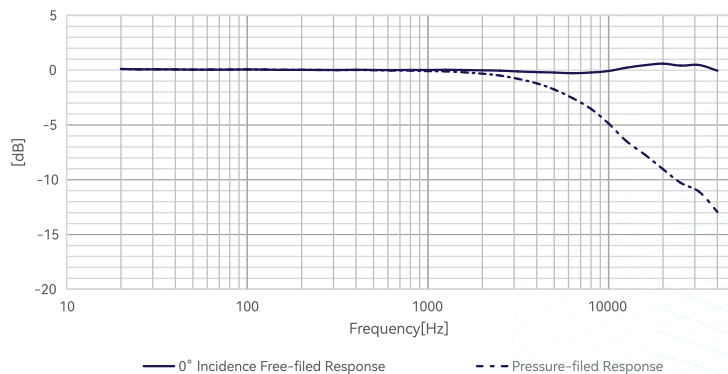


Fig.1 CRY3201-S01 Microphone Set Typical Frequency Response

Dimensions

Height with Grid	88 mm (3.46")
Diameter with Grid	13.2 mm (0.52")

Drawings(mm)[inch]

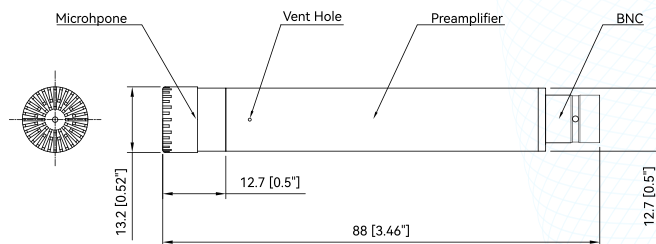


Fig.2 CRY3201-S01 Microphone Set Drawings

Ordering Information

Consisting of

Measurement Microphone	CRY3201 1/2" Free-field Prepolarized Microphone
Preamplifier	CRY3501 1/2" IEPE Preamplifier
Cable	BL5001 BNC to BNC Cable /1.6m

Optional Accessories

Microphone Holder	1/2" Microphone Holder
Power Supply	CRY575 Three-channel Microphone Power Supply

Related Products

CRY3101-S01	1" free-field prepolarized low-noise microphone set, 50 mV/Pa, 4 Hz-16kHz, 12 dB-138dB
CRY3202-S01	1/2" pressure-field prepolarized wide-frequency microphone set, 12.5 mV/Pa, 3.15 Hz-20kHz, 23 dB-150dB
CRY3203-S01	1/2" free-field prepolarized high-sensitivity microphone set, 50 mV/Pa, 3.15 Hz-20kHz, 15 dB-138dB