



CRY3402-S02

1/4" Pressure-Field Prepolarized Ultra-high frequency Microphone Set

Features

- **Key Specifications**

Sensitivity	1.6 mV/Pa
Dynamic Range	45 dB to 168 dB
Frequency Range	4 Hz to 70 kHz \pm 2 dB

- **Applications**

High-frequency (ultrasonic) measurements
High-definition speakers, headphones, and earbud measurements
High Sound Pressure Level (SPL) measurements

- **Standards**

IEC 61094 4:1995 Measurement microphones – Part 4

- **Components**

CRY3402 1/4" pressure-field Prepolarized Microphone
CRY3543 1/4" IEPE Preamplifier

Introduction

CRY3402-S02 is a 1/4 inch pressure field prepolarized measurement microphone and preamplifier designed specifically for high-frequency and high-dynamic-range acoustic measurements.

CRY3402-S02 has a flat frequency response, allowing measurement frequencies up to 70 kHz and sound pressure levels up to 168dB. It is an excellent microphone for high-definition audio measurements and other ultrasonic acoustic applications.

Highlights

- **Use of Ultra-high frequency Pressure-field Microphones**

Ultra-high frequency microphones can accurately capture high-frequency sounds and are highly suitable for ultrasonic detection, high-frequency acoustic research, and other similar applications.

Pressure-field microphone sets are specifically designed for measurements in small enclosed cavities or near the sound source ports, and are widely used in fields such as acoustic research and electroacoustic testing.

- **Compatibility**

The CRY SOUND pre-polarized microphone kit requires a constant current source power module (IEPE power supply), also known as ICP, CCP, etc., capable of supplying a current ranging from 2mA to 20mA.

- **TEDS Microphone Set**

Supports TEDS, and TEDS programmed to the IEEE 1451.4 standard for SMART transducers, V 1.0 format.

- **Calibration**

Each CRY SOUND microphone set is calibrated at the factory using traceable calibration equipment. Calibration certificates are provided with each unit. CRY SOUND recommends recalibration at least once a year.

- **Quality & Warranty**

All CRY SOUND microphone capsules use 3rd generation titanium diaphragms and protection grids and synthetic sapphire insulators – resulting in the most rugged and reliable measurement microphones on the market. Titanium provides superior corrosion resistance, high temperature stability, impact resistance and strength-to-mass than traditional nickel and stainless steel. All capsules are assembled in strict clean-room environments for maximum quality.

CRY SOUND microphones and preamplifiers are supported by a 10-year warranty—offering one of the best service guarantee in the world.

Technical Specifications

Specifications

Field Type	Pressure-field
Sensitivity(± 3 dB)	1.6 mV/Pa, -56 dB re 1V/Pa
Frequency Response	4 Hz to 70 kHz ± 2 dB
Polarization Voltage	0 V
Dynamic Range(re.20uPa)	45 dB to 168 dB
Inherent noise	45 dBA
Operating Temperature	-20°C to +60°C (-4°F to +140°F)
Temperature Stability	0.01 dB/°C (-10°C to +50°C) 0.006 dB/°F (+14°F to +122°F)
Static Pressure Stability	-0.01 dB/kPa
Operating Humidity Range	0 to 90%RH no condensation
Humidity Stability	< 0.1 dB (0 to 90%RH no condensation)
Pressure Equalization Vent	Side vented
IEC 61094-4 Type	WS3P
Output Impedance	< 50 Ω
Maximum Output Voltage	> 10.0 Vp
DC Bias Voltage	12V \pm 2 V
Current Source	IEPE (2 mA to 20 mA)
Typical Operating Current	4 mA
Interface Type	10-32UNF(Microdot)

Frequency Response

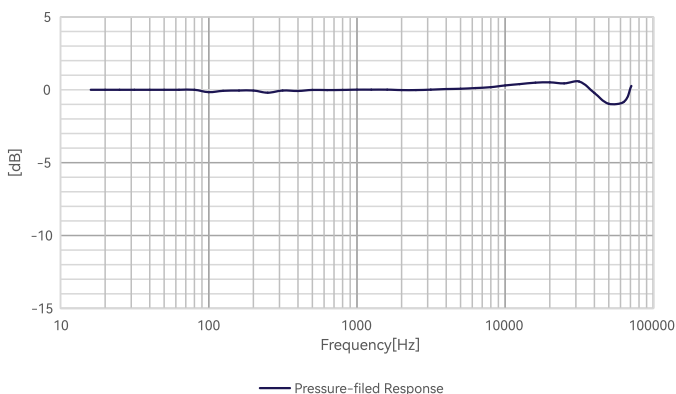


Fig.1 CRY3402-S02 Microphone Set Typical Frequency Response

Dimensions

Height with Grid 56.2 mm (2.213")

Diameter with Grid 7 mm (0.276")

Drawings(mm)[inch]

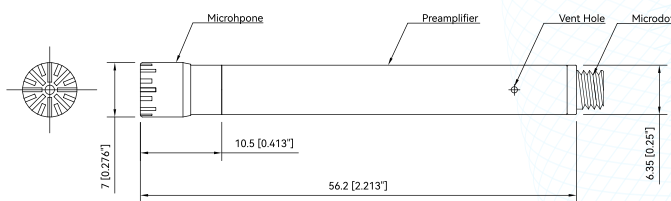


Fig.2 CRY3402-S02 Microphone Set Drawings

Ordering Information

Consisting of

Measurement Microphone	CRY3402 1/4" Pressure-field Prepolarized Microphone
Preamplifier	CRY3543 1/4" IEPE Preamplifier
Cable	Microdot to BNC Cable /1.5m

Optional Accessories

Microphone Holder	1/4" Microphone Holder
Power Supply	CRY575 Three-channel Microphone Power Supply

Related Products

CRY3102-S01	1" pressure-field prepolarized low-noise microphone set, 50 mV/Pa, 4 Hz-8 kHz, 12 dB-138dB
CRY3202-S01	1/2" pressure-field prepolarized wide-frequency microphone set, 12.5 mV/Pa, 3.15 Hz-20kHz, 23 dB-150dB
CRY3404-S01	1/4" pressure-field prepolarized high-level microphone set, 0.56 mV/Pa, 10 Hz-20kHz, 53dB-175dB